




Description

The PermLok interlocking standing seam architectural panel offers both strength and beauty for high-sloped roofing applications.

Design Characteristics

- Available with 1-inch or 1½-inch seam
- Interlocking standing seam; no separate cap
- Designed for use on slopes of 3:12 and above (with a solid deck and underlayment)
- Heavy concealed clips allow thermal movement
- Factory-installed seam sealant, isolated from clip
- Center of panels can be striated or flat
- Available in a variety of widths:
- PermLok 1.0: 13- and 21-inch
- PermLok 1.5: 12- and 18-inch

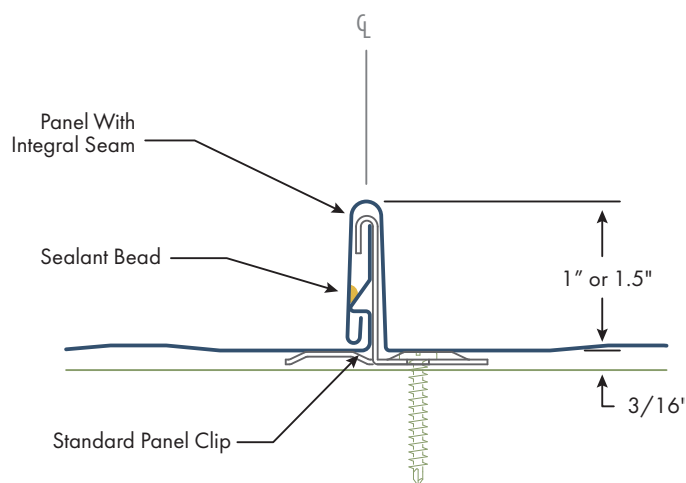

Available Materials



- Aluminum: .032" & .040"
- Galvanized: 22 & 24 gauge
- Galvalume

Testing

- UL-580 Class 90 windstorm rating
- ASTM E-283 air infiltration
- ASTM E-331 water penetration
- ASTM E-1592 uniform static air pressure



Warranties

- 20-year finish warranty
- Materials & workmanship warranty
- 10-year weathertight warranty on qualifying applications



Gable Clip

18 Ga. Galv. Steel
18 Ga. Stainless Steel

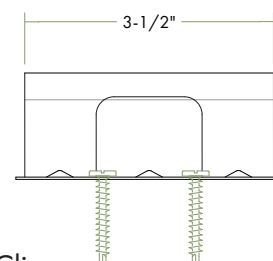

Panel Clip

22 Ga. Galvanized Steel
22 Ga. Stainless Steel