




Description

The TwinLok metal roofing system offers an economical metal roofing option for architectural applications.

Design Characteristics

- Available with 1 1/2-inch or 2-inch seam
- Interlocking standing seam panels
- Designed for use on slopes of 2:12 and above (with a solid deck and underlayment)
- Heavy concealed clips allow thermal movement
- Mechanically double-locked seam
- Factory-applied hot-melt seam sealant
- Center of panels can be striated or flat
- Available in a variety of widths:
 - TwinLok 1.5: 11- and 17-inch
 - TwinLok 2.0: 12-, 16- and 18-inch

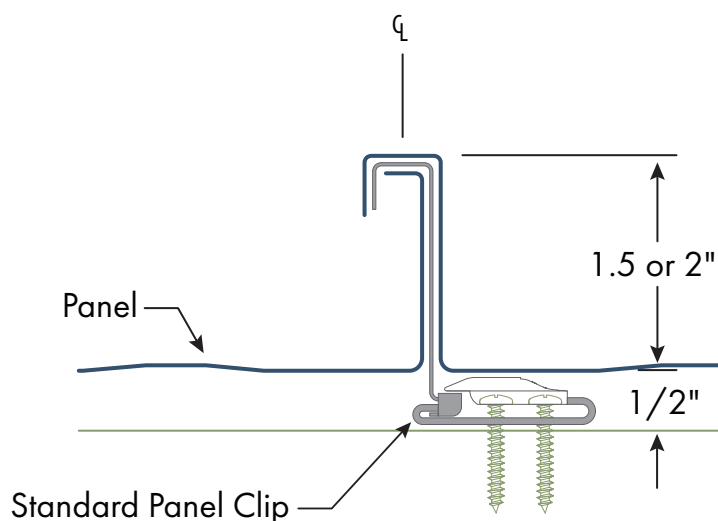

Available Materials

- Aluminum: .032" & .040"
- Galvanized: 22 & 24 gauge
- United Zinc
- Copper




TwinLok Seaming Operation

Testing



- UL-580 Class 90 windstorm rating
- ASTM E-283 air infiltration
- ASTM E-331 water penetration
- ASTM E-1592 uniform static air pressure

Warranties

- 20-year finish warranty
- Materials & workmanship warranty
- Weathertight warranty on qualifying applications



2-piece Panel Clip
24 Ga. Galvanized Steel



Gable Clip
18 Ga. Galv. Steel
18 Ga. Stainless Steel